



Premium Quality



Environmentally Friendly

272  
290  
294  
295

**Cantilever-Style  
Dual Wheel  
Pneumatic Casters**  
CAPACITY TO 7260

**FEATURES**

- **Swivel Casters:** Double ball bearing raceway. BBL models Hardened double ball bearing raceway with 1-1/4" tapered roller thrust bearing
- **Shock Absorbing:** Cushion wheel protects equipment
- **Pressure Lubrication** to all bearings

**RIG OPTIONS**

- **Swivel lock** specify L
- **Face contact brake** specify F
- **Sealed swivel** specify NS
- **Foam fill** available, consult factory

**BEARING OPTIONS**



Straight Roller (01)

Tapered Roller (09)

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

Wheel Diameter (Inches)	Tread Width/Type (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+ Roller Bearing (01), Tapered Roller Bearing (09)
8	2.80/4	590	11	25/8		272SF08501
10	4.10/4	700	13	3 1/4	213/4	272SF10601


272



Dual wheel models are recommended for the greatest possible protection to both loads and floors with increased capacity. If you transport fragile materials or parts, or if you move delicate instruments over rough floors, you should consider this product offering.


290

Wheel Diameter (Inches)	Tread Width/Type (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+ Roller Bearing (01), Tapered Roller Bearing (09)
12	4.10/6	890	15 1/2	3 1/2	35	290SF12701
14	5.30/6	1570	17 3/4	4	41	290SF14801
16	4.80/9	2000	19 1/8	4 1/2	53 1/4	290SF16801
18	5.70/8	2340	21 1/4	5	59 3/4	290SF18901





294

Wheel Diameter (Inches)	Tread Width/Type (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+ Roller Bearing (01), Tapered Roller Bearing (09)
16	4.80/8	2600	19 1/8	4	71	294SF16809SBBL
18	5.70/8	3180	21 1/2	4 1/2	81 3/4	294SF18909SBBL



295

Wheel Diameter (Inches)	Tread Width/Type (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+ Roller Bearing (01), Tapered Roller Bearing (09)
21	6.90/9	4840	24 1/4	5	129 3/4	295SF21909SBBL
23	6.50/10	5550	26 1/4	5	134 1/2	295SF23909SBBL
25	7.50/10	7260	28 3/4	5	139	295SF25909SBBL

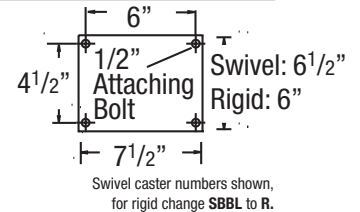

272/290/294/295 SERIES • CAPACITY TO 7260

PNEUMATIC CASTERS