
Access Casters (877) 881-6814

Never-Flat Tires




Never-Flat (NF) is recommended for the greatest possible protection to both loads and floors. Perfect replacement tire for pneumatic or semi-pneumatic applications. This solid urethane tire has similar rollability characteristics as a pneumatic tire... but they never go flat. Optional colors and caster configurations available, consult factory. Replacement parts available: 8" grey wheel and 10" black wheel.



FEATURES

- · Heavy duty 350 pound load capacity!
- · Looks and performs similar to pneumatic wheels, but without the hassles of air pressure maintenance and flat tire repair
- Reduces maintenance time and expense
- Closed cell expanded foam construction resists water absorption (unlike others currently in the marketplace)
- · Sawtooth tread for easy maneuverability and traction (radial tread on 8" model)
- · Quiet, smooth operation
- Non-marking for superior floor protection
- Rolls over obstacles with ease and absorbs shock to protect cargo
- Zerk fittings

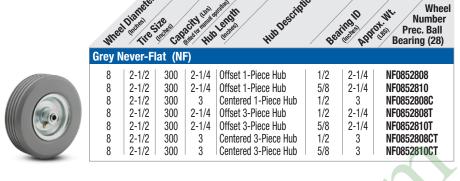



Black Never-Flat (NF)							
10	3-1/2	350	2-1/4	Offset 1-Piece Hub	1/2	5	NF1062808
10	3-1/2	350	2-1/4	Offset 1-Piece Hub	5/8	5	NF1062810
10	3-1/2	350	2-1/4	Offset 3-Piece Hub	1/2	5	NF1062808T
10	3-1/2	350	2-1/4	Offset 3-Piece Hub	5/8	5	NF1062810T
10	3-1/2	350	3-1/2	Centered 1-Piece Hub	5/8	5	NF1062810C
10	3-1/2	350	3-1/2	Centered 3-Piece Hub	1/2	5	NF1062808CT
10	3-1/2	350	3-1/2	Centered 3-Piece Hub	5/8	5	NF1062810CT

10" precision ball and roller bearing models available, roller bearing ID is 3/4". For precision ball models change 27 to 28. For roller bearing models change 27 to 01.

Replacement 10" diameter tire less hub available, specify NF1060022. Replacement parts available.

