

Faultless Precision, Heavy Duty Air Cargo/Conveyor Caster



Faultless

CAPACITY TO 375



Designed for inverted applications, these Faultless conveyor casters are designed for easy installation and replacement in the field. Special dust-and-grease cap and special all-temperature lubricant are standard along with precision bearing swivel and needle bearing wheels. Corrosive-resistant zinc dichromate finish is standard.

MOUNTING OPTIONS

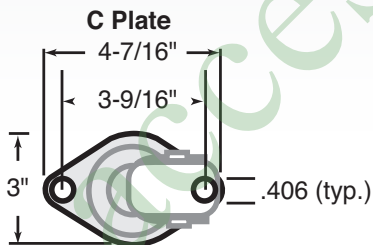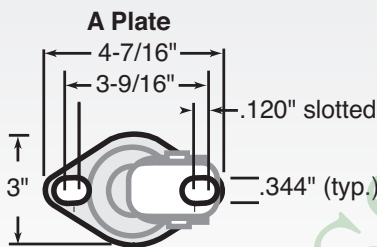

TYPICAL APPLICATIONS

- Cargo Conveyor Equipment

FEATURES

- **Raceways:** Fully sealed raceways for low maintenance and protection of the swivel head in outdoor environments
- **Swivel Bearings:** Precision bearing swivel
- **Wheel Bearings:** Need bearings or ball bearings; thread guards standard for longer life
- **Finish:** Corrosion-resistant zinc dichromate or powder coated finishes
- **Suggested Temperature Range:** 20°F to +180°F
- **Special Top Plates Available:** For specific installation requirements, consult factory

Wheel Diameter (Inches) | Tread Width (Inches) | Capacity (Lbs) (rated for manual operation) | Overall Height (Inches) | Swivel Radius (Inches) | Caster Number

Polyflex Brown (Needle Bearing) with A Plate						Caster Number
2-3/4	13/8	375	41/32	23/8		27015



Polyflex Brown (Needle Bearing) with C Plate						Caster Number
3	15/6	270	325/32	25/8		25675
3	15/6	300	41/32	215/32		25696



Polyflex Grey with Toe Guard (Needle Bearing) with A Plate						Caster Number
2-3/4	13/8	375	41/32	23/16		27016



Polyflex Brown with Toe Guard (Needle Bearing) with A Plate						Caster Number
2-3/4	13/8	375	41/32	213/16		26381

