

Mighty-Mite



Zinc Plated Finish

Black Oxide Finish

Features

- High-strength & heat treated steel for increased durability and caster life
- Dual ball raceways
- RoHS compliant plating for corrosion resistance
- Octagon washer on stem models for easy installation
- NSF approved (less thread guards)

Applications

- Store fixtures
- Carts
- Institutional Equipment
- Food Service Equipment
- Furniture
- Janitorial Equipment
- Office Equipment

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Caster Finish	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection*
1-5/8"	11/16"	2-5/16"	1-5/8"	Soft Rubber	Zinc Plated	70	PRE16___TZ-3R	Threaded: 605 Swivel Plate: 113
				Soft Rubber	Black Oxide	70	PRE16___BO-3R	Threaded: 634
				Polyolefin	Zinc Plated	75	PRE16___TZ-3E	Threaded: 532, 844
				Polyolefin	Black Oxide	75	PRE16___BO-3E	Threaded: 532, 844 Grip Neck: 302
				Polyolefin	Copper Oxide	75	PRE16___CO-3E	Grip Neck: 302 Swivel Plate: 113




Zinc Plated Copper Oxide Black Oxide


*To order, include **blue** fastener code in **Base Model Number**. Example: PRE16**605**ZN-3R

Threaded Stem

Grip Neck Top Plate

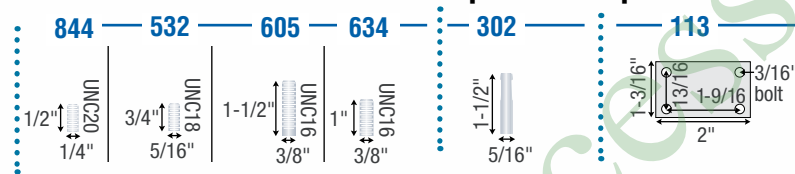

Glass Handling Caster

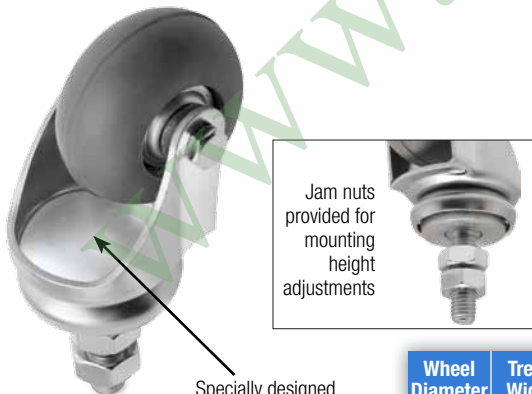

Specially designed raceway system protects against debris

Jam nuts provided for mounting height adjustments

Features

- Specially designed raceway system protects against debris
- Soft non-marking neoprene rubber wheels
- Ball bearing wheels for added rollability
- Zinc plated for corrosion resistance

Applications

- Glass Industry
- Plant Operation
- Conveyor Systems
- Material Handling

Options

- **Fastening Selections:** Additional options available upon request (minimums may apply).

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Material	Wheel Bearing	Dynamic Load (Pounds)	Base Model #	Fastening Selection
2"	15/16"	2-15/16"	1-13/16"	Neoprene	Ball	75	PGN20675ZN-NPR21(GG)	Threaded: 675

