Omega

Features

- Precision ball bearing wheels for smooth, quiet, and easy rollability
- · Fully heat treated
- Dual ball bearing raceways
- · High luster chrome or black finish
- Matching thread guards

Applications

- Furniture
- IV Poles
- Seating
- Medical Equipment
- Electronic Equipment

Options

- Brakes: Tread brake uniformly integrated into body design for smooth look and ease of activation. Add [B] to end of model.
- Bolt-In Stems: available for 403 hollow kingpin models.



Wheel Selection

Floor Protection¹ Non-Marking Durability

Cushioned Ride





V+

V+



MonoTech
√ +

MonoTech Facts

- 1. Provides ultimate floor protection and a quiet, cushioned ride.
- 2. Rolls over obstacles with ease.
- 3. Will not flat spot and is excellent on any floor type.
- 4. Rejects floor debris, including metal shavings and glass.


Finish Selection

Chemical Resistance






Black finish available on 3" MonoTech models; consult factory for other requirements.

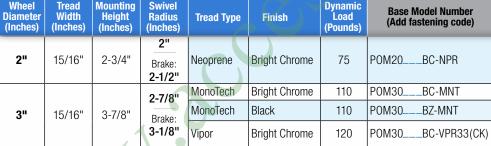

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Finish	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection ²
2"	15/16"	2-3/4"	2" Brake: 2-1/2"	Neoprene	Bright Chrome	75	IPOMOD BU-MPR	Threaded: 507, 637, 605 Grip Ring: 223
3"	15/16"	3-7/8"	2-7/8" N	MonoTech	Bright Chrome	110		Threaded: 507, 605, 637, 748
				MonoTech	Black	110		Grip Neck: 302 Round: 419 Grip Ring: 242, 222, 223, 211
				Vipor	Bright Chrome	120		Hollow Kingpin: 403 Plate: 134

²To order, include **blue** fastener code in **Base Model Number**. Example: POM30<u>507</u>BC-MNT



Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information














¹See page 48 for application details.